

Réduction


RCU



Description

Réduction conique concentrique emboutie générant une faible perte de charge et peu de bruit.

Dimensions

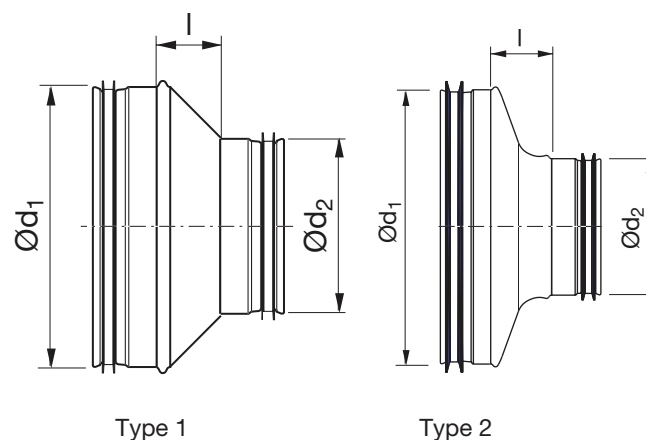

Ød ₁ nom	Ød ₂ nom	l [mm]	Type	m kg
100	80	26	2	0,12
125	80	36	2	0,16
125	100	27	2	0,16
160	80	55	1	0,31
160	100	46	2	0,23
160	125	35	2	0,22
200	100	46	2	0,30
200	125	55	2	0,32
200	160	39	2	0,30
250	125	70	1	0,61
250	160	60	2	0,48
250	200	42	2	0,46
300	200	59	2	0,64
315	160	91	1	0,86
315	200	74	1	0,75
315	250	50	1	0,74
355	250	69	1	1,08
355	315	33	1	0,99
400	200	118	1	1,25
400	250	94	1	1,27
400	315	54	1	1,11
500 *	250	128	1	2,10
500	315	95	1	1,78
500	400	68	1	1,75
630 *	315	160	1	3,30
630 *	400	118	1	3,20
630 *	500	68	1	2,90
800 *	400	203	1	6,85
800 *	500	153	1	5,14
800 *	630	88	1	4,70

* Fabriquée manuellement

Codification

Produit	RCU	315	250
Dimension Ød ₁			
Dimension Ød ₂			





Réduction



RCU

Caractéristiques techniques

1

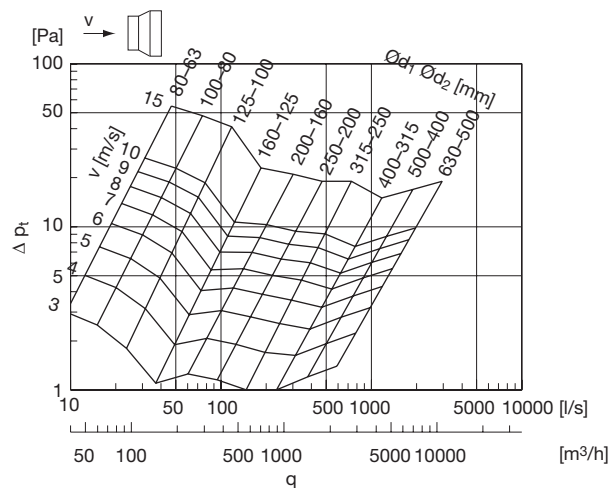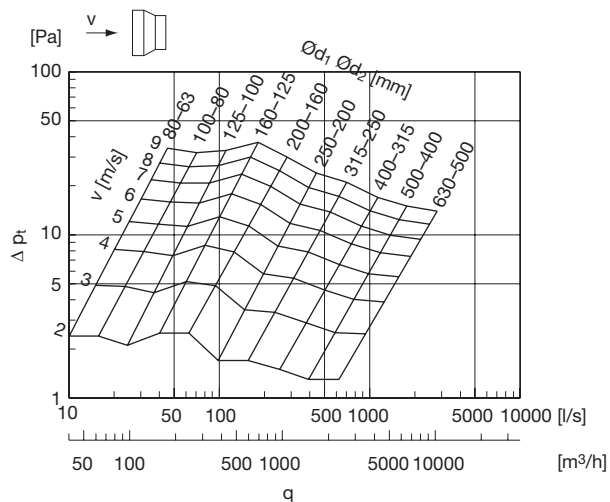

2

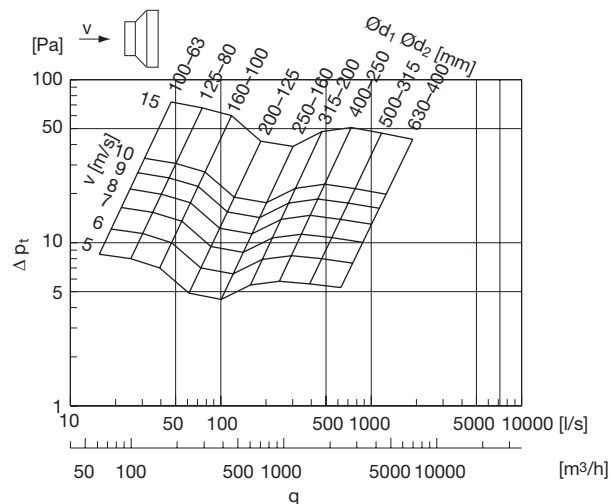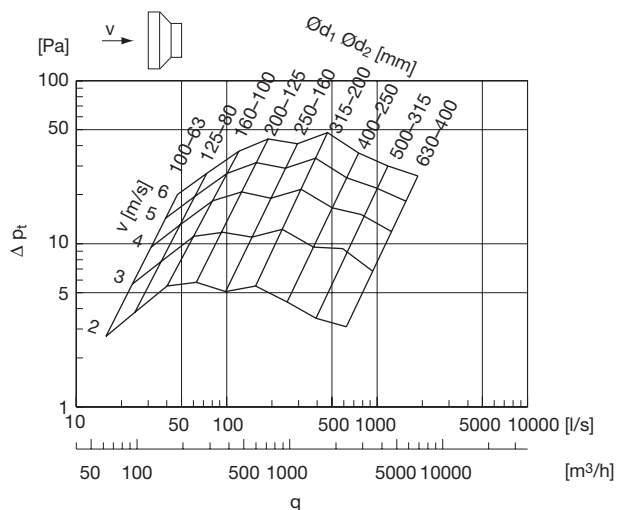

3

